


MH型5~20吨电动葫芦门式起重机(桁架式)



MH Type 5~20t Electric Hoist Gantry Crane(Trussed type)

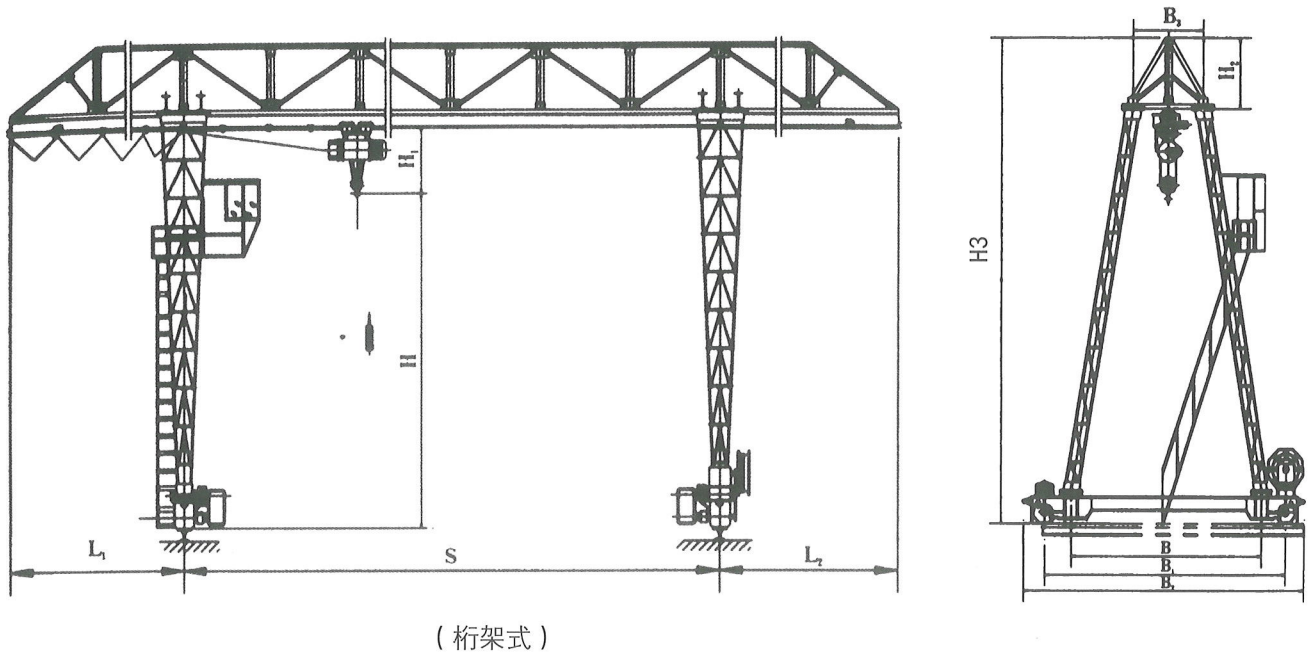

简介 A Brief Introduction

MH型电动葫芦门式起重机与CD、MD等型号的电动葫芦配套使用，是一种有轨运行的中小型起重机，其适用起重量5~20吨，适用跨度12~30米，工作环境 -20°C ~ $+40^{\circ}\text{C}$ 内。

本产品为一般用途起重机，多用于露天场所及仓库的装卸或抓取物料，本产品有地面操纵和室内操纵两种型式。

MH Model Electric Hoist Girder Gantry Crane is used together with CD MD Model Electric hoists. It is a track travelling small and medium-sized crane. Its proper Lifting weight is 5 to 20 tons. Proper span is 12 to 30 meters, its proper working temperature is -20°C to 40°C .

This product is a regular crane widely used at open ground and warehouses to load, unload or grab materials. It has two controlling methods, namely ground controlling and room controlling.

技术参数 Technological parameter

起重量 Lifting Weight		t	5			
跨度 Span		m	12	16	20	24
起升高度(m) Lifting Height H		m	6 / 9			
电动葫芦 Electric Hoist	型号 Type No.		CD ₁ MD ₁			
	起升速度 Lifting Speed		m/min	8 0.8 / 8		
	运行速度 Travelling Speed		m/min	20		
	电动机 Motor	起升 Lifting		ZD1 41-4 / 7.5 ZDS ₁ 0.8 / 7.5		
运行 Travelling			ZDY21-4 / 0.8			
工作级别 Working class			A3			
荐用钢轨 Steel Track Recommended			P24			
电源 Power Supply			三相交流 380V 50HZ			
最大轮压 Max.Wheel Pressure		KN	37 / 42	40 / 46	44 / 50	48 / 54
基本尺寸 Basic Dimensions	L ₁	mm	2000	3000	4000	5000
	L ₂	mm	2000	3000	4000	5000
	H ₁	mm	1120			
	H ₂	mm	1100	1250	1350	1500
	H ₃	mm	8265 / 11265	8285 / 11465	8485 / 11665	8486 / 10665
	B	mm	4500 / 5900			
	B ₁	mm	5200 / 6600			
	B ₂	mm	5600 / 7000			
	B ₃	mm	1500			

MH型5~20吨电动葫芦门式起重机(桁架式)

MH Type 5~20t Electric Hoist Gantry Crane(Trussed type)



技术参数 Technological parameter

起重量 Lifting Weight		t	10				
跨度 Span		m	12	16	20	24	30
起升高度(m) Lifting Height		m	6;9				
电动葫芦 Electric Hoist	型号 Type No.		CD ₁ MD ₁				
	起升速度 Lifting Speed	m/min	7 0.7 / 7				
	运行速度 Travelling Speed	m/min	20				
	电动机 Motor	起升 Lifting		ZD ₁ 51-4 / 13 ZDS ₁ 1.5 / 13			
运行 Travelling			ZDY ₁ 21-4 / 0.8 × 2				
工作级别 Working class			A3				
荐用钢轨 Steel Track Recommended			P38				
电源 Power Supply			三相交流 380V 50HZ				
最大轮压 Max.Wheel Pressure		KN	97 / 102	105 / 110	113 / 118	121 / 126	149
基本尺寸 Basic Dimensions	L ₁	mm	3000	4000	5000	6000	7500
	L ₂	mm					
	H ₁	mm	1350				
	H ₂	mm	1250	1500	1650	1900	
	H ₃	mm	9600 / 11600	8750 / 11750	9000 / 12000	12250	
	B	mm	4500 / 5500		5500 / 6500		
	B ₁	mm	5500 / 6500		6500 / 7500		
	B ₂	mm	6000 / 7100		7100 / 8100		
	B ₃	mm	1600				

技术参数 Technological parameter

起重量 Lifting Weight		t	16				
跨度 Span		m	12	16	20	24	30
起升高度(m) Lifting Height		m	6;9				
电动葫芦 Electric Hoist	型号 Type No.		CD ₁				
	起升速度 Lifting Speed		m/min	3.5			
	运行速度 Travelling Speed		m/min	20			
	电动机 Motor	起升 Lifting	ZD ₁ 51-4 / 13				
运行 Travelling		ZDY ₁ 21-4 / 0.8 × 2					
工作级别 Working class			A3				
荐用钢轨 Steel Track Recommended			P43				
电源 Power Supply			三相交流 380V 50HZ				
最大轮压 Max.Wheel Pressure		KN	143 / 150	152 / 159	165 / 174	169 / 176	180 / 190
基本尺寸 Basic Dimensions	L1	mm	3000	4000	5000	6000	
	L2	mm					
	H1	mm	2300				
	H2	mm	1700	2000	2100	2200	2500
	H3	mm	10100 / 13100	10400 / 13400	10400 / 13400	10600 / 13600	10700 / 13700
	B	mm	5500 / 6000			6500 / 7500	
	B1	mm	6500 / 7000			7500 / 8500	
	B2	mm	7000 / 7500			8000 / 9200	
	B3	mm	1600			1700	

MH型5~20吨电动葫芦门式起重机(桁架式)

MH Type 5~20t Electric Hoist Gantry Crane(Trussed type)



技术参数 Technological parameter

起重量 Lifting Weight		t	20				
跨度 Span		m	12	16	20	24	30
起升高度(m) Lifting Height		m	6;9				
电动葫芦 Electric Hoist	型号 Type No.		HC				
	起升速度 Lifting Speed		m/min 3.5				
	运行速度 Travelling Speed		m/min 20				
	电动机 Motor	起升 Lifting	ZD ₁ 52-4 / 18.5				
运行 Travelling		ZDY ₁ 21-4 / 0.8 × 4					
荐用钢轨 Steel Track Recommended			P43				
电源 Power Supply			三相交流 380V 50HZ				
最大轮压 Max.Wheel Pressure		KN	173 / 181	188 / 196	202 / 210	217 / 225	228 / 236
基本尺寸 Basic Dimensions	L1	mm	3000	4000	5000	6000	7500
	L2	mm					
	H	mm	6000 / 9000				
	H1	mm	1825				
	H2	mm	1600	1800	2000	2200	2400
	B	mm	5500 / 6000			6500 / 7500	
	B1	mm	6500 / 7000			7500 / 8500	
	B2	mm	7000 / 7500			8000 / 9200	
	B3	mm	1600			1700	