



# QY型5~10吨绝缘桥式起重机

## QY Type 5~10t Insulation Bridge Crane

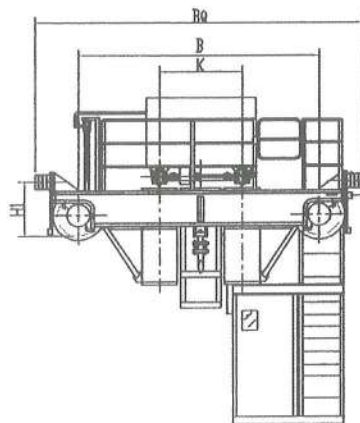

简图: sketch

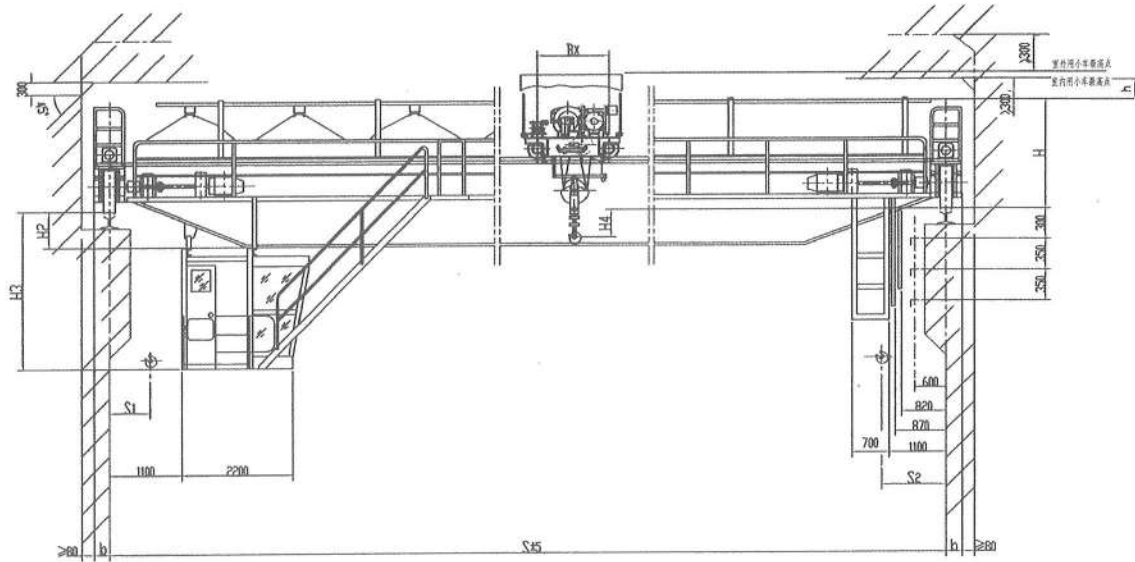

本样本所提供重量为设计值，制造值为 $\pm 5\sim 15\%$ 。

The weight of this sample is design value and actual weight varies  $\pm 5\sim 15\%$ .

### 技术参数 Technological parameter

起重量Lifting Weight		t	5							10									
跨度span		m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	
最大起升高度Max Lifting Height		m	16							16									
工作级别 working class			A6							A6									
速度 Speed	起升lift	m/ min	15.6							10.4									
	小车运行 Travelling of crab		37.2							43.8									
	大车运行 Travelling of trolley		92.7				93.7			92.7			93.7		86.5				
主要尺寸 (mm) Main size	H	mm	1764							1874				1926					
	H <sub>3</sub>		2526	2546	2596	2756	2906	3056	3206	3356	2526	2546	2596	2756	2906	3008	3158	3308	
	H <sub>1</sub>		735										790						
	H <sub>4</sub>		761							1282				1232					
	h		870																
	k		1400							2000									
	B <sub>0</sub>		5190			5340				6100			5840		5980			6330	
	B		3400			3550				5000			4050				5000		
	BX		1100							1400									
	b		230																
	H <sub>2</sub>		-24	126	226	376	526	676	826	976	-24	126	226	376	526	676	826	976	
	S <sub>1</sub>		800							1050									
	S <sub>2</sub>		1250							1300									
最大轮压 Max. wheel pressure	KN	85	91	92	104	111	125	133	138	111	118	126	131	138	154	163	171		
荐用钢轨 Steel track recommended		P38							P43										
电源 Power source		三相交流 3-Phase A.C 50Hz 380V																	



### 技术参数 Technological parameter

起重量Lifting Weight		t	16 / 3.2								20 / 5								
跨度span			10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	
最大起升高度 Max Lifting Height	主 main	m	16								12								
	副 aux		18								14								
工作级别 working class			A6								A6								
速度 Speed	主起升 main lift	m/ min	10.7								9.8								
	副起升 aux lift		14.6								15.5								
	小车运行 Travelling of crab		44.6																
	大车运行 Travelling of trolley		76				89				76				89				
主要尺寸 (mm) Main size		H	2095	2097			2187		2185			2097	2099		2189				
		H <sub>3</sub>	2570		2550	2620	2770	2920	3070	3220	2570	2574	2554	2624	2772	2922	3072	3222	
		H <sub>1</sub>	790			880					790			880					
		H <sub>4</sub>	1527	1525	1435	1437					1461	1459		1369					
		H <sub>5</sub>	1000								596								
		h	820																
		k	2000																
		B <sub>0</sub>	6235			6235			6835			6235			6235		6835		
		B	4400					5000				4400					5000		
		B <sub>x</sub>	2400																
		b	230			260					230			260					
		H <sub>2</sub>	80	180	240	390	540	690	840	80	84	184	244	392	542	692	842		
		S <sub>1</sub>	1040								1030								
		S <sub>2</sub>	1850								1900								
		S <sub>3</sub>	1500								1450								
S <sub>4</sub>	2310								2320										
最大轮压Max. wheel pressure	KN	155	164	173	194	203	214	223	232	177	188	199	221	233	243	255	265		
荐用钢轨Steel track recommended		P43 / QU70																	
电 源Power source		三相交流 3-Phase A.C 50Hz 380V																	