


YZ型75 / 20~180/40吨双梁铸造桥式起重机



YZ Type 75 / 20~180/40t Double-beam Cast Bridge Crane

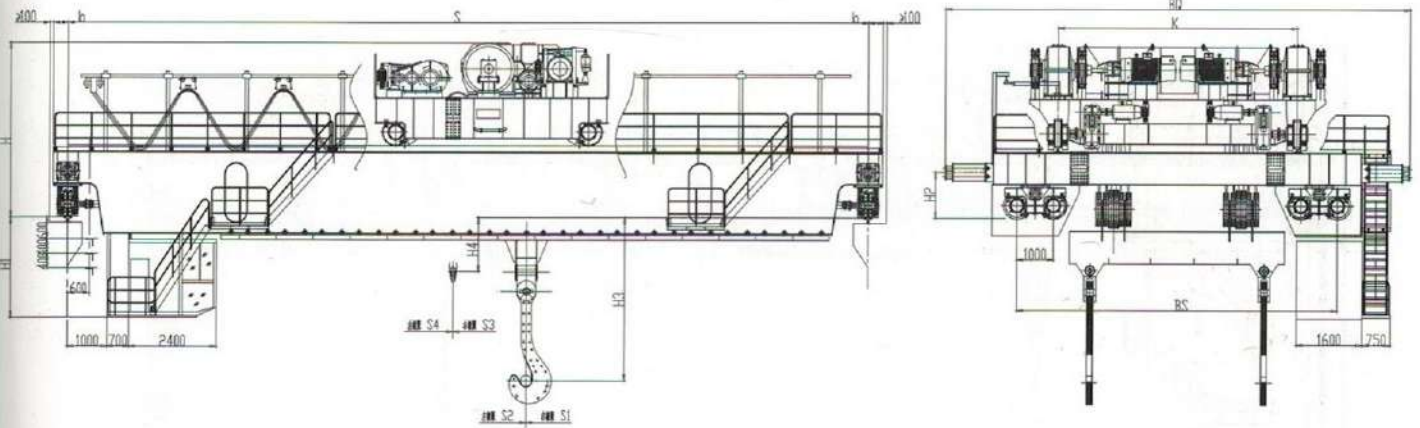

技术参数 Technological parameter

起重量(t) Lifting capacity		100 / 32			125 / 32		140/40			160/50			180/40(50)		
工作级别 Working class		A7			A7		A7			A7			A7		
跨度 S(m) Span		19	22	25	19	22	19	22	25	19	22	25	19	22	25
起升高度 (m) Lifting Height	主钩 Main hook	18	20	25	24	20	23			24			24		
	副钩 Auxiliary hook	20	22	27	26	22	25			26			26		
速度 Speed	主钩 Main hook	6.8	6.8	8.6	9.5	7.6	6.3			6			6		
	副钩 Auxiliary hook	9.5	9.5	12	12	9.5	9.5			7.8			9.5		
	小车 trolley	37	37	41	42	36	34.8			36			38.8		
	大车 crane	68	68	77	77	77	77.8			68			78		
主要尺寸 (mm) Dimensions	H	4300	4300	4500	5150	5200	5350	5350	5350	5600	5600	5600	6600	6600	6600
	H ₁	4500	4500	5000	5000	5000	2750	2850	2950	2850	2950	3050	2850	2950	3050
	H ₂	1200	1200	1300	1350	1350	1300	1300	1300	1350	1350	1350	1400	1400	1400
	B ₀	13500	13800	14800	14800	14800	12850	12850	12850	12850	12850	12850	16800	16800	16800
	B ₅						8900	8900	8900	10000	10000	10000	13700	13700	13700
	K	7800	8000	9000	9000	9000	6500	6500	6500	6800	6800	6800	10500	10500	10500
	b	410	410	410	410	410	400	400	400	400	400	400	400	400	400
极限尺寸 limit dimension	H ₃	3500	3500	3500	380	380	5000	5000	5000	5500	5500	5500	6000	6000	6000
	H ₄	1200	1200	1200	1200	1200	1600	1600	1600	1700	1700	1700	1500	1500	1500
	S ₁	2000	2000	2000	2200	2200	2500	2500	2500	2600	2600	2600	2600	2600	2600
	S ₂	3700	3700	3700	4100	4100	4600	4600	4600	4750	4750	4750	5100	5100	5100
	S ₃	4100	4100	4100	4700	4700	4700	4700	4700	4850	4850	4850	5100	5100	5100
	S ₄	1600	1600	1600	1600	1600	2400	2400	2400	2500	2500	2500	2600	2600	2600
车轮数量 Number of wheels							8	8	8	16	16	16	16	16	16
最大轮压 (KN)Max wheel load		520	530	545	580	595	640	650	665	404	412	420	505	515	530
荐用钢轨 Steel track Recommended		QU120	QU120	QU120	QU120	QU120	QU120	QU120	QU120	QU120	QU120	QU120	QU120	QU120	QU120
电源 Power source		三相交流 380V 50HZ 3-Phase A.C. 380V 50HZ													